

Danacoustic Tiles P-52



There are certain situations where only a tile has the visual and functional qualities required. In these circumstances Danacoustic marine tiles can be specified with confidence, having been approved for use on oil and gas platforms where ratings up to B-0 or B-15 are required.

Our marine tiles have been chosen for larger areas such as dining rooms, lounges etc. They have excellent acoustic properties and can be supplied with a plain or perforated face depending on the sound requirements. Perforated – C-class only.



MARINE TILES - COLOURS

Colour is obviously an essential element in interior design, so although standard panels are white, we can work with your designers to meet almost any colour specification.

Recessed light fittings are available.

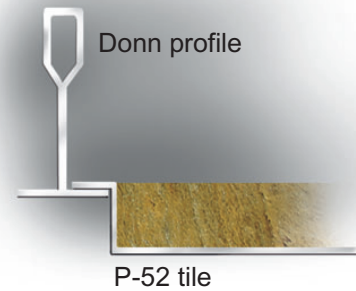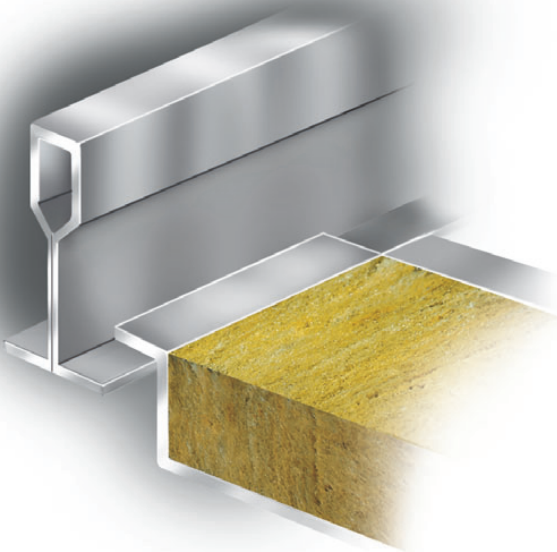

P-53 plain tile
Non-combustible only

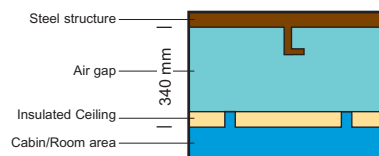

DESCRIPTION	TILES	
Fire Class (P-52 only)	B-0 / A-15	B-15 / A-30
Module width	300 x 300 / 600 x 300 / 600 x 600 mm	300 x 300 / 600 x 300 / 600 x 600 mm
Insulation	Rockwool	Rockwool
Thickness	25 mm	25 x 75 mm
Density	31-35 kg/m ³	31-35 + 45 kg/m ³
Weight	5.7 - 6.9 kg/m ²	9.1 - 10.3 kg/m ²

WWW-NORAC-NO

